
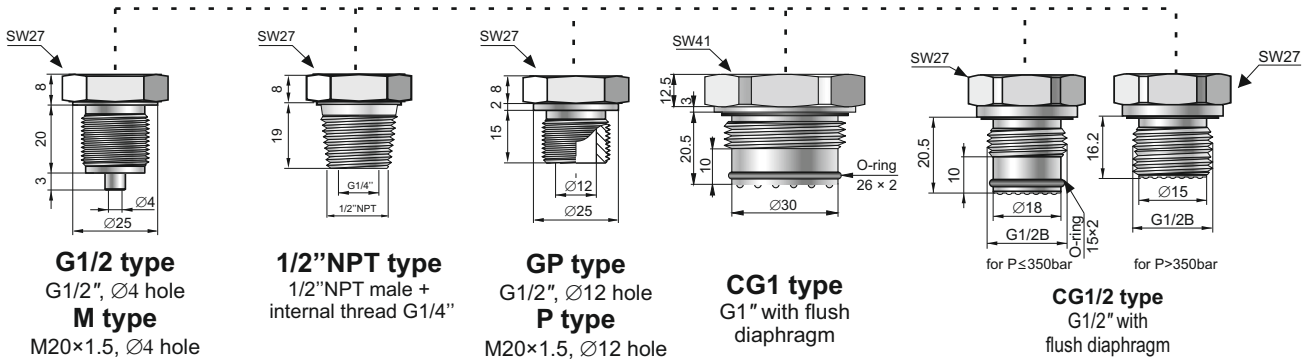
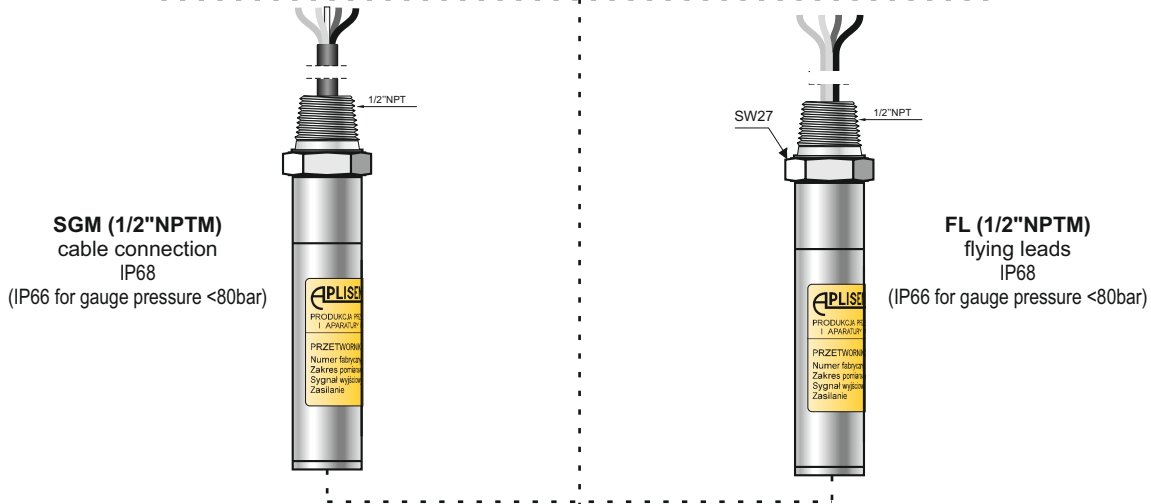


PRESSURE TRANSMITTER PCE-28.MODBUS

- ✓ Digital communication protocol Modbus RTU
- ✓ Intrinsic safety and explosion proof certificates (ATEX, IECEx)
- ✓ Accuracy 0.1%

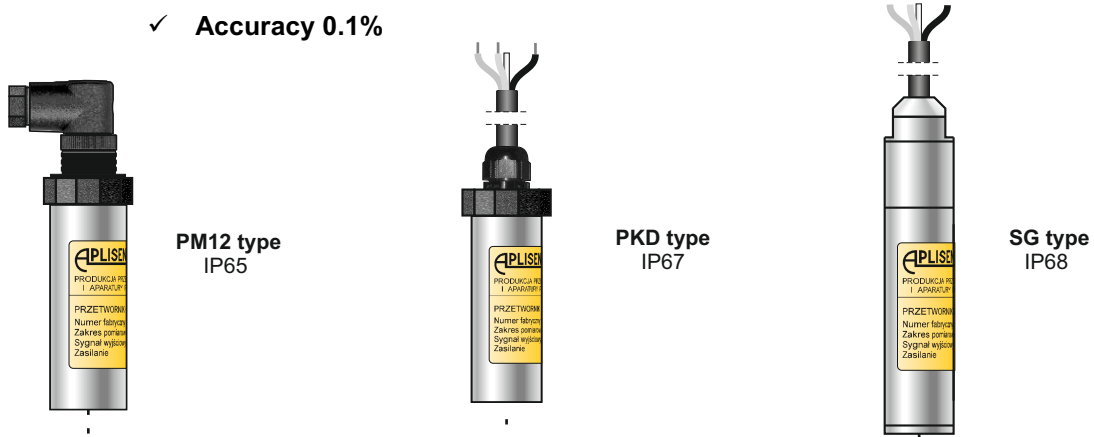

Application

The transmitters PCE-28.Modbus have two operating modes, configuration mode and Modbus mode. The configuration mode is used for changing settings and detailed diagnostics of the transmitter. In this mode you can also activate a current loop compatible with a 4-20 mA current output.

Installation

The transmitter is not heavy, so it can be installed on the installation without additional mounting bracket. When the pressure of steam or other hot media is measured, a siphon or impulse line should be used. The needle valve placed upstream the transmitter simplifies installation process and enables the zero point adjustment or the transmitter replacement. The transmitter's electrical connections should be performed with twisted cable. The place for the communicator should be assigned before the communicator installation.

Measuring ranges

No	Nominal measuring range (FSO)		Overpressure limit (without hysteresis)***	
1	0...1000 bar	(0...100 MPa)	1200 bar	(120 MPa)
2	0...600 bar	(0...60 MPa)	1200 bar	(120 MPa)
3	0...300 bar	(0...30 MPa)	450 bar	(45 MPa)
4	0...160 bar	(0...16 MPa)	450 bar	(45 MPa)
5	0...70 bar	(0...7 MPa)	140 bar	(14 MPa)
6	-1...70 bar	(-0,1...7 MPa)	140 bar	(14 MPa)
7	0...25 bar	(0...2,5 MPa)	50 bar	(5 MPa)
8	-1...25 bar	(-0,1...2,5 MPa)	50 bar	(5 MPa)
9	0...7 bar	(0...0,7 MPa)	14 bar	(1,4 MPa)
10	-1...7 bar	(-100...700 kPa)	14 bar	(1,4 MPa)
11	-1...1,5 bar	(-100...150 kPa)	4 bar	(400 kPa)
12	0...2 bar	(0...200 kPa)	4 bar	(400 kPa)
13	0...1 bar	(0...100 kPa)	2 bar	(200 kPa)
14	-0,5...0,5 bar	(-50...50 kPa)	2 bar	(200 kPa)
15	0...0,25 bar	(0...25 kPa)	1 bar	(100 kPa)
16	-100...100 mbar	(-10...10 kPa)	1 bar	(100 kPa)
17	-15...70 mbar	(-1,5...7 kPa)	0,5 bar	(50 kPa)
18	0...1,3 bar abs	(0...130 kPa abs)	2 bar	(200 kPa)
19	0...7 bar abs	(0...0,7 MPa abs)	14 bar	(1,4 MPa)
20	0...25 bar abs	(0...2,5 MPa abs)	50 bar	(5 MPa)
21	0...70 bar abs	(0...7 MPa abs)	140 bar	(14 MPa)
22	0...300 bar abs	(0...30 MPa abs)	450 bar	(45 MPa)

Technical data

Metrological parameters

Accuracy	≤ ±0,1% of calibrated range
Long-term stability (for the basic range)	≤ accuracy for 3 years
Thermal error	< ±0,08% (FSO) / 10°C (0,1% for ranges no. 16, 17) max. ±0,25% (FSO) in the whole compensation range (0,4% for ranges 16, 17)
Thermal compensation range	-25...80°C
Additional electronic damping	0...30 s
Error due to supply voltage changes	0.002% (FSO) / V

Materials

Wetted parts and diaphragms:	316Lss
Casing:	304ss (optional: 316ss)

Electrical parameters

Power supply	4...28 V DC Exia version: 4...10 V DC in 4...20mA mode (only non Exia version): 5...28 V DC
Transmission range	1200 m
Output	MODBUS RTU or 4...20 mA
Address space	1...247 devices address
Transmission speed	1200, 2400, 4800, 9600, 19200, 28800, 38400, 57600, 115200 bps
Parity transmission	no parity, odd, even
Frame transmission	10...11bits (1, 2 bit-stop)
<i>* more information about electrical parameters available in user's manual</i>	

Ordering procedure

Model	Code	Description
PCE-28.Modbus		Smart pressure transmitter
Versions, certificates more than one option is available	/Exia.....	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> </div> <div> II 1/2G Ex ia IIC T4/T5/T6 Ga/Gb </div> </div>
		<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> </div> <div> Ex ia IIC T4/T5/T6 Ga/Gb II 1/2G Ex ia IIC T4/T5/T6 Ga/Gb II 1D Ex ia IIIC T110°C Da </div> </div>
		<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> </div> <div> I M1 Ex ia I Ma Ex ia IIC T4/T5/T6 Ga/Gb </div> </div>
		<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> </div> <div> Ex ia IIIC T105°C Da Ex ia I Ma II 2G Ex db IIC T6/T5/T4 Gb II 2D Ex tb IIIC T85°C/T100°C/T120°C Db </div> </div>
	/Exd.....	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> </div> <div> II 2G Ex db IIC T6/T5/T4 Gb II 2D Ex tb IIIC T85°C/T100°C/T120°C Db </div> </div>
	/MR.....	Marine certificate – DNV, BV
	/Tlen.....	For oxygen service (sensor filled with Fluorolube fluid), only G1/2" connection
Nominal measuring range	/0+1000 bar.....	0+1000 bar (0+100 MPa)
	/0+600 bar.....	0+600 bar (0+60 MPa)
	/0+300 bar.....	0+300 bar (0+30 MPa)
	/0+160 bar.....	0+160 bar (0+16 MPa)
	/0+70 bar.....	0+70 bar (0+7 MPa)
	/-1+70 bar.....	-1+70 bar (-0,1+7 MPa)
	/0+25 bar.....	0+25 bar (0+2,5 MPa)
	/-1+25 bar.....	-1+25 bar (-0,1+2,5 MPa)
	/0+7 bar.....	0+7 bar (0+700 kPa)
	/-1+7 bar.....	-1+7 bar (-100+700 kPa)
	/-1+1,5 bar.....	-1+1,5 bar (-100+150 kPa)
	/0+2 bar.....	0+2 bar (0+200 kPa)
	/0+1 bar.....	0+1 bar (0+100 kPa)
	/-0,5+0,5 bar.....	-0,5+0,5 bar (-50+50k Pa)
	/0+0,25 bar.....	0+0,25 bar (0+25 kPa)
	/-100+100 mbar.....	-100+100 mbar (-10+10 kPa)
/-15+70 mbar.....	-15+70 mbar (-1,5+7 kPa)	
/0+1,3 bar ABS.....	0+1,3 bar ABS (0+130 kPa ABS)	
/0+7 bar ABS.....	0+7 bar ABS (0+700 kPa ABS)	
/0+25 bar ABS.....	0+25 ABS (0+2,5 MPa ABS)	
/0+70 bar ABS.....	0+70 bar ABS (0+7 MPa ABS)	
/0+300 bar ABS.....	0+300 bar ABS (0+30 MPa ABS)	
Electrical connection	/PM12.....	304SS housing, IP65 with thread M12x1 (without cable)
	/PKD.....	304SS housing, IP67, cable electrical connection (3 m of cable in standard)
	/SG.....	316LSS housing, IP68, cable electrical connection (3 m of cable in standard)
	/SGM.....	316LSS housing, IP68 or IP66, cable electrical connection (3 m of cable in standard) (only in Exd version)
	/FL.....	316LSS housing, IP68 or IP66, flying leads (2 m of flying leads in standard) (only in Exd version)
Process connections	/M.....	Thread M20x1,5 (male) with Ø4 hole, wetted parts SS316L
	/G1/2.....	Thread G1/2" (male) with Ø4 hole, wetted parts SS316L
	/P.....	Thread M20x1,5 (male) with Ø12 hole, wetted parts SS316L
	/GP.....	Thread G1/2" (male) with Ø12 hole, wetted parts SS316L
	/CG1".....	Thread G1" with flush diaphragm, wetted parts SS316L (Pressure limits: min. 0,1bar / max. 70bar)
	/CG1/2".....	Thread G1/2" with flush diaphragm, wetted parts SS316L (Pressure limits: min. 2,5bar)
	/1/2"NPTM.....	Thread 1/2"NPT Male, G1/4" Female, wetted parts SS316L (Pressure limits: 1/2"NPT Male max. 690bar, G1/4" Female max. 1000bar)
Accessories	/MT.....	Stainless Steel Tag plate mounted on wire
Other specification	/.....	Description of required parameters

} Not available with range no. 1, 2